



UNDER CANOPY

MODEL IL-UNDCPY-170

WATTS 170W

VOLTAGE 120-277V

SKU IL- UC170-B2FR

TECHNICAL SPECS

Efficacy	3.0 $\mu\text{mol/J}$
PPF	510 $\mu\text{mol/s}$
Input Power	170W
Input Voltage	120 - 277V AC
Input Current	0.58 - 1.33A
Frequency	50/60Hz
Thermal Management	Passive
Ambient Temperature	0-40°C / 32-104°F
Light Distribution	120°
Control	0 - 10V Dimming
Light Distribution	50,000 hrs



PHYSICAL SPECIFICATIONS

Length	1150 mm	45.3"
Width	72 mm	2.8"
Height	80 mm	3.1"







VOLTAGE & AMPERAGE

120V	208V	220V	277V
1.42A	0.82A	0.77A	0.62A

MOUNTING & COVERAGE



SPECTRUM BALANCING

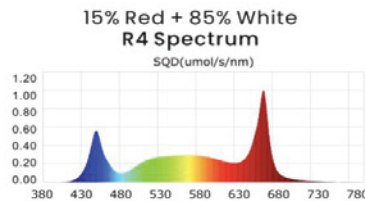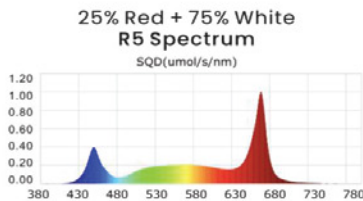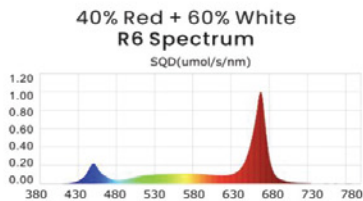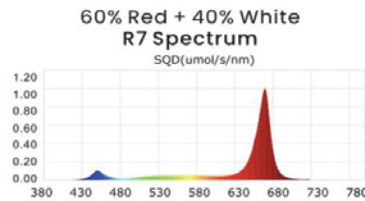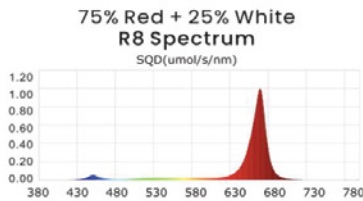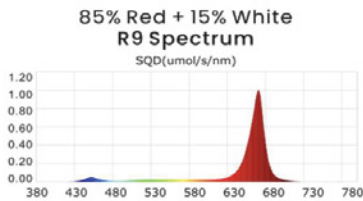

Daisy-Chain@:
120V - Up to 12 Lights | 208V - Up to 20 Lights
240V - Up to 24 Lights | 277V - Up to 27 Lights



3FT (0.9m) Connection Cable
(sold separately)




6FT (1.82m) Extension w/ 0-10v Port
(sold separately)



POWER AND DATA

1 SINGLE JOINT CONNECTION

4FT x 4FT Area

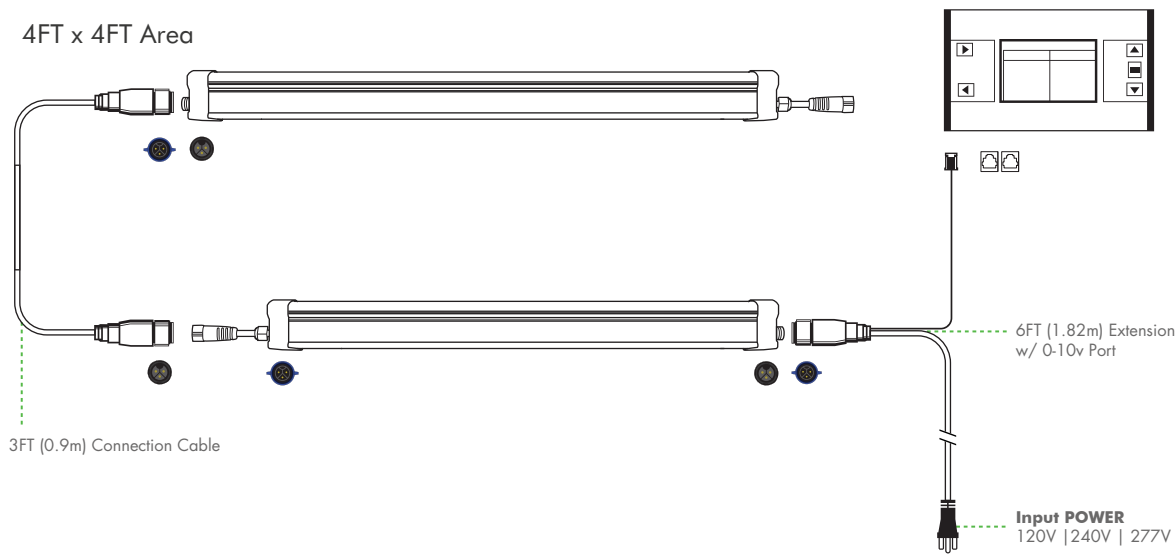

2 SINGLE JOINT CONNECTION

4FT x 8FT Area

