



iLogic^{930W} FS PLUS

MODEL: ILOGIC FS PLUS
VOLTAGE: 200 - 480V

WATTS 930W
SKU IL-L930FS-HV

TECHNICAL SPECS



Rated Voltage	200 - 480V
Power Consump	930W ± 5%
Power Supply	Sosen LED Drivers
PPF	3213.6 μmol
Efficacy	3.12 μmol/J
LED Spectrum	Full Spectrum
Min Power Factor - Power Factor	>0.9
THD	<10%
Crest Factor	<10%
BTU	3500
Frequency	60Hz
Dimming	0 - 100% dimming via RS485
Ambient Temperature - Working	0°C - 35°C / 32° - 95°F
Relative Humidity	<90%
Color Temperature	3600K
Color Rendering Index	85
Emitting Cooling	Aluminum heatsink
Light Distribution - Beam Angle	120 Degree
Waterproof Rating	IP65
LED Lifespan	50000 hours
Daisy Chain	Max. 256 LED fixtures for output A and output B individually
Light Source	Samsung LM281B+Pro White LED * 3640 pcs Honglitrionic SMD3535 660nm * 280 pcs

VOLTAGE AND AMPERAGE



Voltage	240V	277V	347V	480V
Amperage	3.87A	3.35A	2.68A	1.93A

PHYSICAL SPECIFICATIONS

Height	75mm / 2.9"
Weight - N.W./G.W.	14.5kg / 16.5kg 32lbs / 36.3lbs
Package Size	1130*625*85mm / 44.5*24.6*3.3"

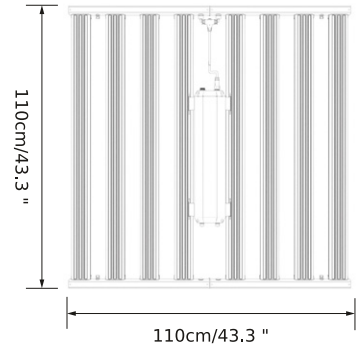

SPECTRUM

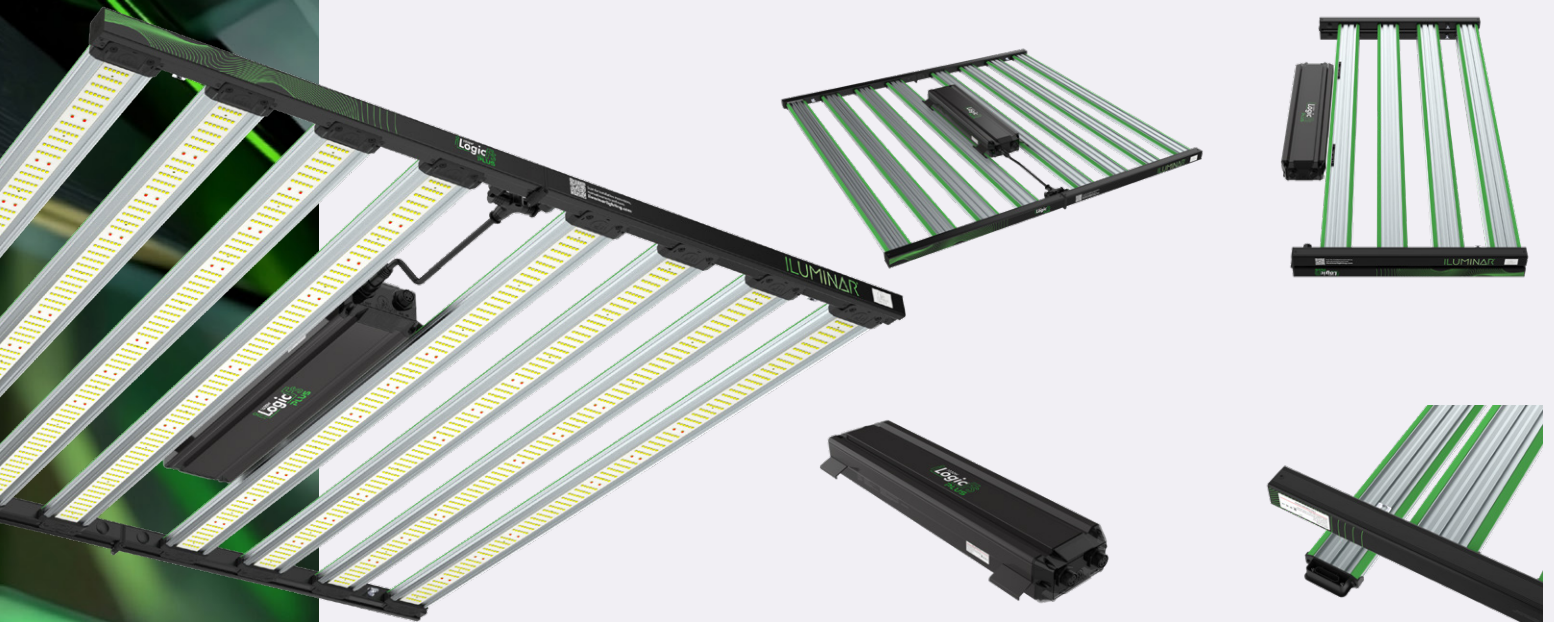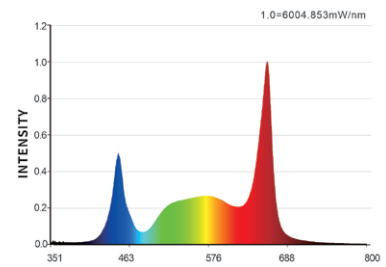

0 This commercial fixture requires a separately purchased Plus Controller to operate.

5 YEAR WARRANTY



www.iluminarlighting.com | 1-877-540-5588 | sales@iluminarlighting.com
© Copyright 2026 ILUMINAR Lighting. Subject to change without notice.