



HYPERMOL EFX

MODEL: HyperMol 720W

WATTS 720W

VOLTAGE: 110 - 277V

SKU IL-HMEFX-720


TECHNICAL SPECS

| | |
|---------------------------------|---|
| Rated Voltage | AC 110 - 277V |
| Power Consump | 720W ± 5% |
| Power Supply | Fahold LED Drivers |
| PPF | 2088 μmol/s |
| Efficacy | 2.9 μmol/J |
| LED Spectrum | Full Spectrum |
| Power Factor | >0.9 |
| Control | Dimmer / 0-10V input and output |
| Frequency | 60Hz |
| Ambient Temperature - Working | 0°C - 35°C / 32° - 95°F |
| Light Distribution - Beam Angle | 120 Degree |
| Waterproof Rating | IP65 |
| LED Lifespan (90% of Life) | 50000 hours |
| Daisy Chain | Samsung LM281B+ Pro * 2100 |
| Light Source | pcs 4000K LED+ Honglitronic SMD3535 660nm * 180 pcs |




PHYSICAL SPECIFICATIONS



Height 115mm / 4.5"
 Weight - N.W./G.W. 11.5kg/13kg - 25.35bs / 28.6lbs

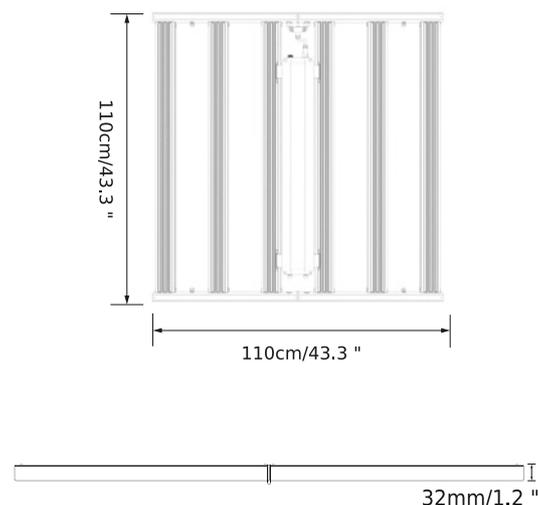

SPECTRUM

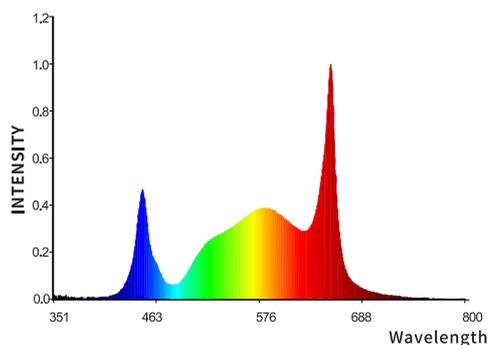

CONTROL DIAGRAM

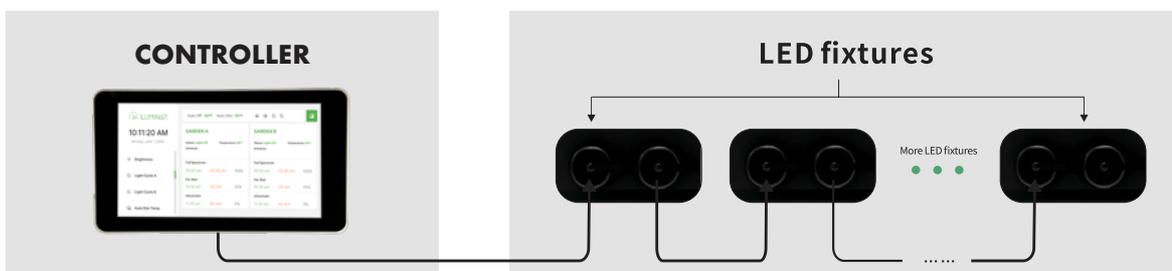

5 YEAR WARRANTY



www.iluminarlighting.com 1-877-540-5588 sales@iluminarlighting.com

© Copyright 2026 ILUMINAR Lighting. Subject to change without notice.